

## Quick Start Guide Bluetooth Music Receiver WM-BT15

### Compatible with the following models:


- OPEL Agila A from 2004 onwards
- OPEL Antara from 2006 onwards
- OPEL Astra H from 2004 onwards
- OPEL Combo C from 2004 onwards
- OPEL Corsa C from 2004 onwards
- OPEL Corsa from 2006 onwards
- OPEL Meriva A from 2005 onwards
- OPEL Movano A from 2006 onwards
- OPEL Signum from 2003 onwards
- OPEL Tigra TwinTop from 2005 onwards
- OPEL Vectra C from 2005 onwards
- OPEL Vivaro from 2006 onwards
- OPEL Zafira B from 2005 onwards

### In conjunction with the following original radios:

- CD30 MP3 (only with AUX preparation)
- CDC 40 Opera
- CD60 Navi
- DVD90 Navi

### Connect the adapter:

1. Remove the radio (you will find various instructions on the Internet).
2. Before disconnecting the plugs from the radio, make sure that the radio code is available to you as you will need it for the radio after the power cut.
3. Disconnect the Quadlock plug from the radio.
4. Connect the WM-BT15 between the vehicle wiring harness and the radio.

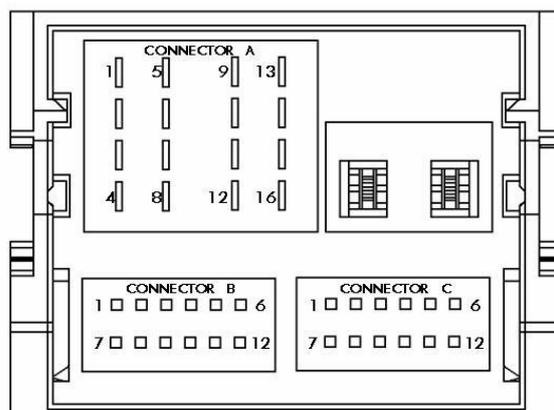


5. Establish a Bluetooth connection by enabling Bluetooth pairing and searching for the Bluetooth device ``WM``.  
If you cannot find the device, please refer to "Important Information".  
You should then set the volume on the connected device to full volume.
6. Before reinstalling the radio, test the function of the adapter. Switch on the AUX function with the AM/FM button or via the menu (AM->FM->AUX).


## Important information!

Please make sure that the AUX function is enabled. You must be able to select AUX on the radio. If this is not the case, it is necessary to activate it in an OPEL workshop. But for this the AUX preparation must be available! (see pin assignment on radio).


Vehicle models built from mid-2004 onwards usually already have a Can-Bus system and thus no ignition plus behind the radio. However, this is necessary for the start-up of the Bluetooth adapter! If the adapter is not found via Plug & Play during the Bluetooth search, you have to cut the red cable from the small black box directly behind the plug and extend it to the cigarette lighter or terminal 15 (switching plus) of the fuse box and tap the required voltage there. Unfortunately there is no alternative for these models.

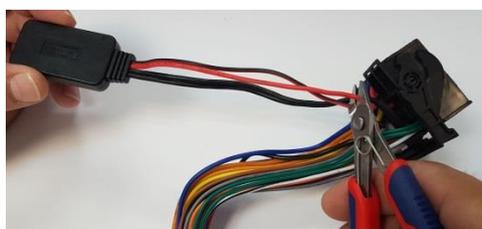

Cut the red cable that goes to the Bluetooth adapter directly behind the plug..

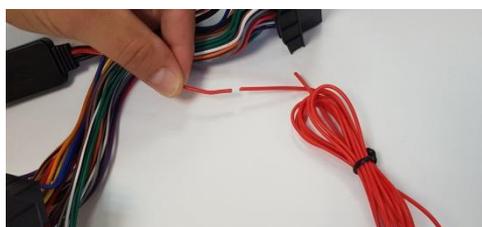


Now connect the red cable with the loose red cable, which is included in the scope of delivery..

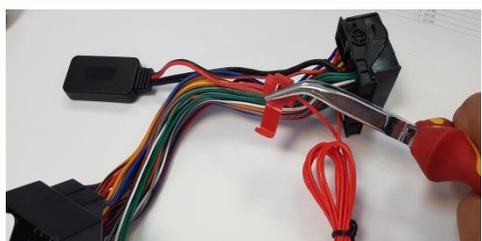

Use one of the cable clamps supplied for this purpose.  
Then press in the metal pin.

**If the adapter does not work after the conversion, please check the contact here.**

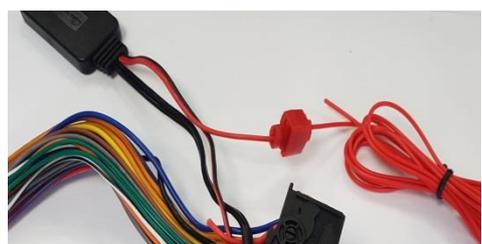

The result should then look like on the picture!

Now you can pick up the external power supply ignition plus / switching plus 12V, for example, from the cigarette lighter.

**Never tap the continuous plus / battery plus 12V!  
This permanent power supply would damage the article within a few days!**

Something has remained unclear? You reach us MO-FR, from 8-17 o'clock under the E-Mail: [technik@watermark-germany.de](mailto:technik@watermark-germany.de)