

Quick Start Bluetooth Music Receiver WM-BTMIC15

Compatible with the following models:


- OPEL Agila A from Baujahr 2004
- OPEL Antara from Baujahr 2006
- OPEL Astra H from Baujahr 2004
- OPEL Combo C from Baujahr 2004
- OPEL Corsa C from Baujahr 2004
- OPEL Corsa D from Baujahr 2006
- OPEL Meriva A from Baujahr 2005
- OPEL Movano A from Baujahr 2006
- OPEL Signum from Baujahr 2003
- OPEL Tigra TwinTop from Baujahr 2005
- OPEL Vectra C from Baujahr 2005
- OPEL Vivaro from Baujahr 2006
- OPEL Zafira B from Baujahr 2005

In conjunction with the following original radios:

- CD30 MP3 (only with AUX preparation)
- CDC 40 Opera
- CD60 Navi
- DVD90 Navi

Connecting the adapter

1. Remove the radio (you will find various instructions on the Internet).
2. Before disconnecting the plugs from the radio, make sure you have the radio code available to you, as you will need it for the radio after the power interruption
3. Disconnect the quadlock connector from the radio.
4. Connect the WM-BTMIC15 between the vehicle wiring harness and the radio.

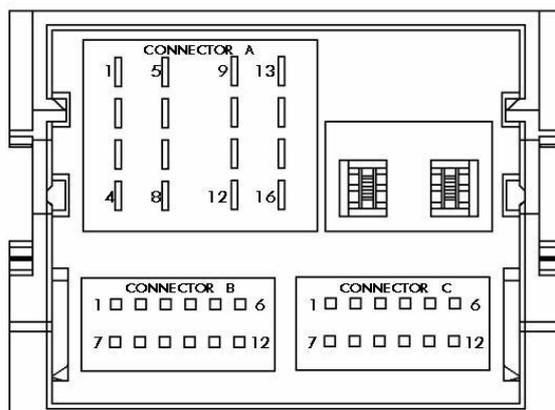

5. Position the microphone near the driver in the vehicle (steering wheel fairing, dashboard, etc.). The cable is then routed to the Bluetooth adapter and connected to the microphone input. **Avoid placing the microphone in the immediate vicinity of or on airbags.**
6. Establish a Bluetooth connection by enabling Bluetooth pairing and searching for the Bluetooth device ``WM``. If you cannot find the device, please refer to "Important Information". You should then set the volume on the connected device to full volume.
7. Before reinstalling the radio, test the function of the adapter. Switch on the AUX function with the AM/FM button or via the menu (AM->FM->AUX)..

Important information!


Please make sure that the AUX function is enabled. You must be able to select AUX on the radio. If this is not the case, it is necessary to activate it in an OPEL workshop. But for this the AUX preparation must be available! (see pin assignment on radio).

Vehicle models built from mid-2004 onwards usually already have a CAN bus system and thus no ignition plus behind the radio. However, this is required for commissioning the Bluetooth adapter! If the adapter is not found by Plug & Play during the Bluetooth search, you have to cut the red cable from the small black box directly behind the plug.

and up to the cigarette lighter or terminal 15 (switching plus) of the fuse box and tap the required voltage there. Unfortunately there is no alternative for these models.



Cut the red cable that goes to the Bluetooth adapter directly behind the plug.

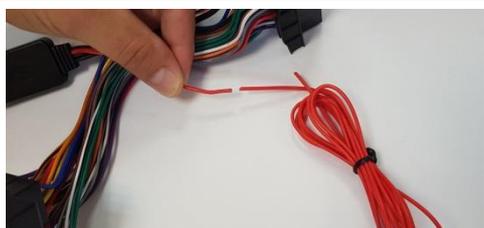


Now connect the red cable with the loose red cable, which is included in the scope of delivery.



Use one of the cable thieves supplied for this purpose. Then press in the metal pin with a pair of needle-nose pliers.

If the adapter does not work despite the conversion, please check the contact here.

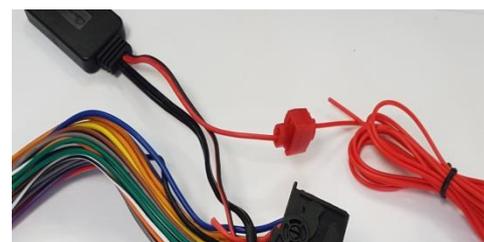

The result should then look like on the picture

Now you can access the external power supply ignition plus / switching plus 12V e.g. from the cigarette lighter.

**Never tap the continuous plus / battery plus 12V!
This permanent power supply would damage the article within a few days (total loss!).**

Anything unclear? You reach us MO-FR, from 8-17 o'clock
of the e-mail: technik@watermark-germany.de