

Quick Start Guide Bluetooth Music Receiver WM-BT35

Compatible with the following models:

- A-Class (W169) from build year 2004
- B-Class (W245, T245) from build year 2005
- C-Class (W203, S203) Facelift from build year 2004
- CL-Class (C215) Facelift from build year 2003
- CLK-Class (C209, A209) from build year 2004
- M-Class (W164) from build year 2005
- G-Class (W463) from build year 2007
- GL-Class (X164) from build year 2006
- R-Class (W251) from build year 2006
- S-Class (W221) Facelift from build year 2003
- SL-Class (R230) from build year 2004
- Vito/Viano (W639) from build year 2006
- Sprinter (W906) from build year 2006

Only in conjunction with the following head units:


- Audio 20
- Audio 50 APS
- Comand APS NTG 2

Not compatible with the following models / radios:

- Audio 5
- Audio 10
- Audio 30
- NTG 1, NTG 2.5, NTG 3, NTG 3.5
- E-Class (A211, W211)
- CLS-Class (W219)
- SLK-Class (R171)

Connect the adapter:

1. Remove the radio (you will find various instructions on the internet).
2. Before disconnecting the plugs from the radio, make sure that the radio code is available to you as you may need it for the radio after the power cut.
3. Insert the white Most Strecker of the adapter into chamber B (marked red in the picture).

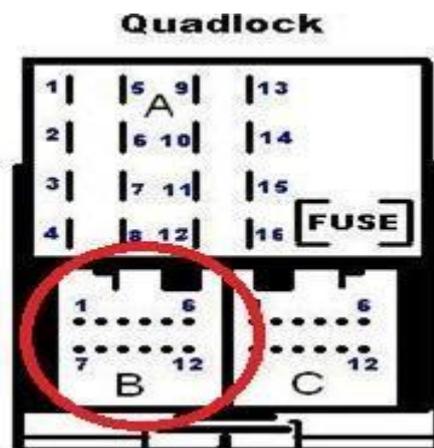

4. Now connect the black earth cable (GROUND) to the radio housing or the black cable directly to a ground lead to the radio connection (mostly brown thick cable). Without a good ground connection, the function of the adapter is not given.
5. Now connect the red cable (ignition plus + 12V) to a switched + 12V line. Since these are usually no longer available behind the radio, you can keep the voltage for example from the cigarette lighter or the air conditioner (measurement with multimeter necessary). Ignition on = + 12V are on / Ignition off = 0V are on.
6. Establish a Bluetooth connection by activating the Bluetooth search (pairing) and searching for the Bluetooth device `` WM''. You should then set the volume to full volume on the connected device.
7. Before reinstalling the radio, test the function of the adapter. To do this, switch on the AUX function via the AUDIO button on the radio.

For Info!

The AUX function must be selectable or unlocked!

If AUX is not displayed in the menu, it is necessary to unlock the AUX input at the dealer or in the workshop, otherwise the adapter will not be recognized.

Has something been left unclear? You can reach us MO-FR by mail: service@watermark-germany.de