

Quick Start Guide Bluetooth Music Receiver WM-BTMIC35

Compatible with the following models:

- A-Class (W169) from year 2004
- B-Class (W245, T245) from year 2005
- C-Class (W203, S203) Facelift from year 2004
- CL-Class (C215) Facelift from year 2003
- CLK-Class (C209, A209) from year 2004
- M-Class (W164) from year 2005
- G-Class (W463) from year 2007
- GL-Class (X164) from year 2006
- R-Class (W251) from year 2006
- S-Class (W221) Facelift from year 2003
- SL-Class (R230) from year 2004
- Vito / Viano (W639) from year 2006
- Sprinter (W906) from year 2006

Only in conjunction with the following factory radio stations:

- Audio 20
- Audio 50 APS
- Comand APS NTG 2


Not compatible with the following models / radios:

- Audio 5
- Audio 10
- Audio 30
- NTG 1 or NTG 2.5
- E-Class (W211)
- CLS-Class (W219)
- SLK-Class (R171)

Connect the adapter:

1. Remove the radio (you will find various instructions on the internet).
2. Before disconnecting the plugs from the radio, make sure that the radio code is available to you as you may need it for the radio after the power cut.
3. Insert the white Most Strecker from WM-BTMIC35 into chamber B (marked red in the picture).
4. Position the microphone near the driver in the vehicle (steering wheel trim, instrument panel, etc.). Lay the cable and connect the jack plug to the jack socket (MIC) on the WM-BTMIC35.

Avoid placing the microphone in the immediate vicinity of or on airbags

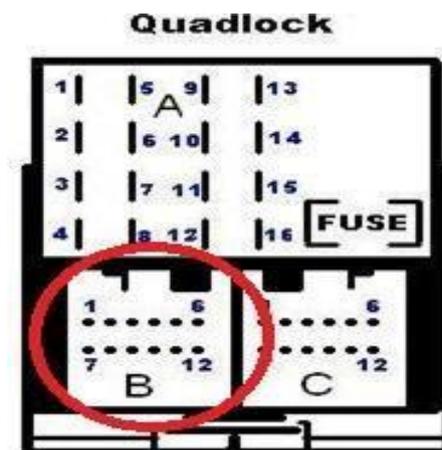

5. Now connect the black earth cable to the radio housing or the black cable directly to a ground lead to the radio connection (usually brown thick cable). Without a good ground connection, the function of the adapter is not given.
6. Now connect the red cable (ignition plus + 12V) to a switched + 12V line. Since this is usually no longer available behind the radio, you can pick up the voltage here, for example, from the cigarette lighter or the air conditioning (measurement with multimeter necessary). Ignition on = + 12V are on / Ignition off = 0V are on.
7. Establish a Bluetooth connection by activating Bluetooth pairing and searching for the ``WM`` Bluetooth device. You should then set the volume to full volume on the connected device.
8. Before reinstalling the radio, test the function of the adapter. To do this, switch on the AUX function via the AUDIO button on the radio.

For info!

The AUX function must be selectable or enabled!

If AUX is not displayed in the menu, it is necessary to activate the AUX input at the dealer or in the workshop, otherwise the adapter will not be recognized.

Has something been left unclear? You can reach us MO-FR, from 8-17 o'clock under the
E-Mail: service@watermark-germany.de