


## Quick Guide Bluetooth Music Receiver WM-BTMIC38

Compatible with the following models:

- ALFA ROMEO 147, 156, 159, Brera, Mito, GT, Spider
- FIAT 500, Bravo from year 2007 to 2014, Croma 2005, Doblo from 2001, Ducato from year 2002, Idea from year 2004, Multipla from year 1999, Palio, Panda from year 2004 to 2017, Punto 188 from year 1999 to 2007, Punto 199 from year 2005, Punto Evo from year 2009, Stilo from year 2002
- LANCIA Musa, Ypsilon

### Connect the adapter:

1. Remove the radio (you will find various instructions on the Internet).
2. Before disconnecting the plugs from the radio, make sure that the radio code is available to you, as you will need it for the radio after the power interruption.
3. Insert the yellow extensor of the adapter into chamber C1 (marked C1 in the picture).
4. If necessary, remove the yellow plug from the yellow-green-blue plug combination and attach the yellow plug of the WM-BT16 there instead.
5. If necessary, remove the yellow plug from the yellow-green-blue plug combination and attach the yellow plug of the WM-BT16 there instead.

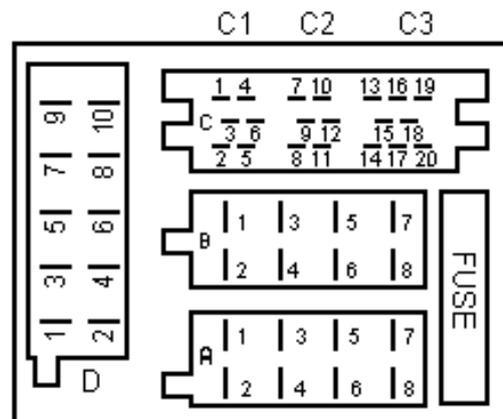

6. Now connect the black ground cable to the radio housing or the black cable directly to a ground cable to the radio connection (usually a thick brown cable). Without a good ground connection the function of the adapter is not given.
7. Now connect the red cable (ignition plus +12V) to a switched +12V line. As this is usually no longer present behind the radio, the voltage can be taken from the cigarette lighter or the air conditioner (measurement with multimeter necessary). Ignition on = +12V on / ignition off = 0V on.
8. Position the microphone near the driver in the vehicle (steering wheel fairing, dashboard, etc.). The cable is then routed to the Bluetooth adapter and connected to the microphone input.  
**Avoid placing the microphone in the immediate vicinity of or on airbags.**
9. Establish a Bluetooth connection by enabling Bluetooth pairing and searching for the Bluetooth device ``WM``. You should then set the volume on the connected device to full volume.
10. Before reinstalling the radio, test the function of the adapter. Switch on the AUX function with the CD/Mode button.

## **For Info!**

AUX must be enabled and selectable on the radio. If this is not the case, it must be activated in a specialist workshop.

Anything unclear? You reach us MO-FR, from 8-17 o'clock by e-mail: [service@watermark-germany.de](mailto:service@watermark-germany.de)