


Quick Start Guide Bluetooth Music Receiver WM-BT21

Compatible with the following manufacturers / models with Comand 2.0 Navi-Radio:

- E-Class (W / S210) from year 1999
- C-Class (W / S203) from year 2000
- SL-Class (R230) from year 2001
- S-Class (W220) Facelift from year 2002
- CL-Class (C215) Facelift from year 2003
- SL-Class (R230) from year 2004
- S-Class (W220) Facelift from year 2003

Connect the Adapter:

1. Remove the radio (you will find various instructions on the internet).
2. Before disconnecting the plugs from the radio, make sure that the radio code is available to you as you will need it for the radio after the power cut.
3. Plug the MQS Strecker from the WM-BT21 into the radio (chamber C2 in the picture).
If the MQS plug is already in use, you will have to remove the pins from our adapter and pin it into the provided pins (original plug) based on the pin assignment on the radio.

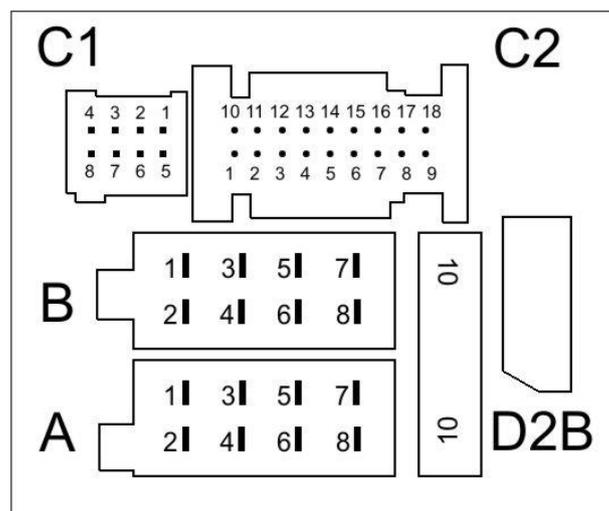

4. Now connect the black earth cable to the radio housing or the black cable directly to a ground lead to the radio connection (i.d.R., brown thick cable). Without a good ground connection, the function of the adapter is not given.
5. Now connect the red cable (ignition plus + 12V) to a switched + 12V line. Since these are usually no longer available behind the radio, you can here the voltage, for example. from the cigarette lighter or the air conditioner (measurement with multimeter necessary). Ignition on = + 12V are on / Ignition off = 0V are on.
6. Establish a Bluetooth connection by activating Bluetooth pairing and searching for the ``WM`` Bluetooth device. You should then set the volume to full volume on the connected device.
7. Before reinstalling the radio, test the function of the adapter. Switch on the AUX function in the menu.

Has something been left unclear? You can reach us MO-FR, from 8-17 o'clock under the
E-Mail: service@watermark-germany.de